



Dashboard Mounting Option -


- 1 Attach Hook & Loop to Detector

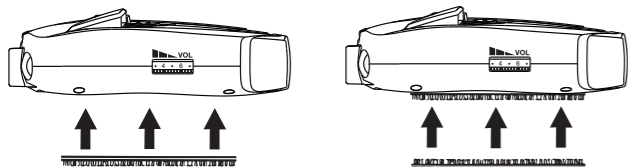

- 2 Attach Detector to Dashboard Surface

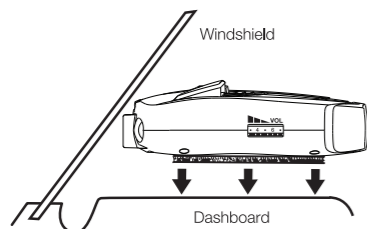

- 3 Connect Detector to 12V Power Source



Download the Cobra iRadar® App



Share and receive red light, speed camera and live enforcement alerts from the iRadar driving community.



- A Connecting your Detector to your Smartphone via Bluetooth®

- 1 Power on RAD 480i - Make sure the unit is connected to your car's 12V port.

Note: the first time RAD 480i is powered on, you will be prompted to select your time zone and daylight saving time

- 2 Install and run the Cobra iRadar app on your smartphone


Note: the first time you run the app, you will be prompted to register a new account

- 3 In the iRadar app, press the Menu button then select "Devices"

- 4 Select "RAD 480i" from the list

- 5 In the iRadar app, the RAD 480i entry will display "Connected" when it has paired. Press the "Menu" button then "Home" to return to the Map screen.

- 6 You're all set!

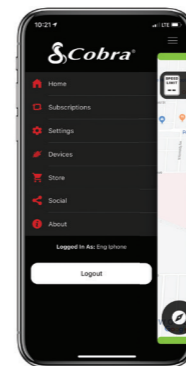

Cobra®

RAD 480i

RADAR/LASER DETECTOR



QUICK START GUIDE

THANK YOU!
For purchasing the new
COBRA® RAD 480i

Full manual available at: www.cobra.com






FCC ID: BBOIRADD5. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.


Cobra® iRadar® and the snake design are registered trademarks of Cobra Electronics Corporation, USA.

Cobra Electronics Corporation™ is a trademark of Cobra Electronics Corporation, USA. Other trademarks and trade names are those of their respective owners.

RAD 480i Features

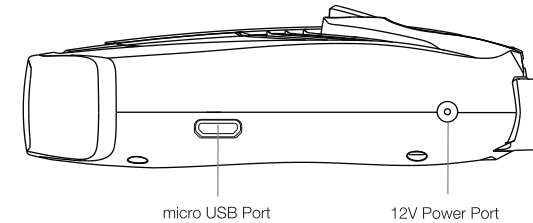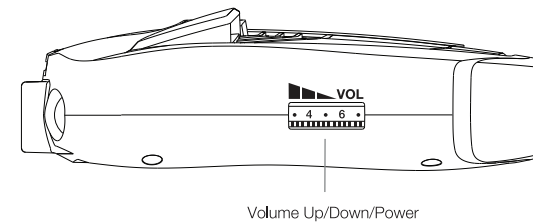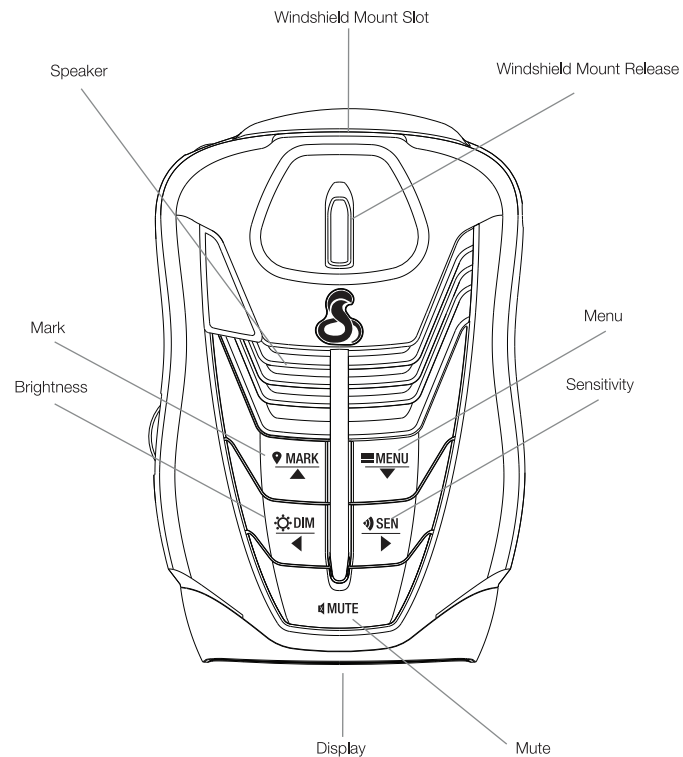


Windshield Suction Cup Bracket



12V Power Cord

Windshield Mounting Option -

- 1 Assemble Suction Cup Bracket




- 2 Adjust Suction Cup Bracket to ensure your RAD 480i has a level view of the road



- 3 Attach Suction Cup Bracket to Windshield



- 4 Attach RAD 480i to Suction Cup Bracket

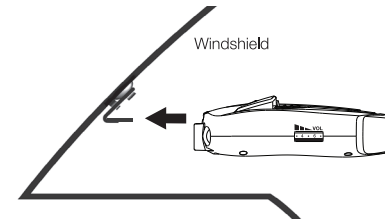

- 5 Connect Detector to 12V Power Source

